
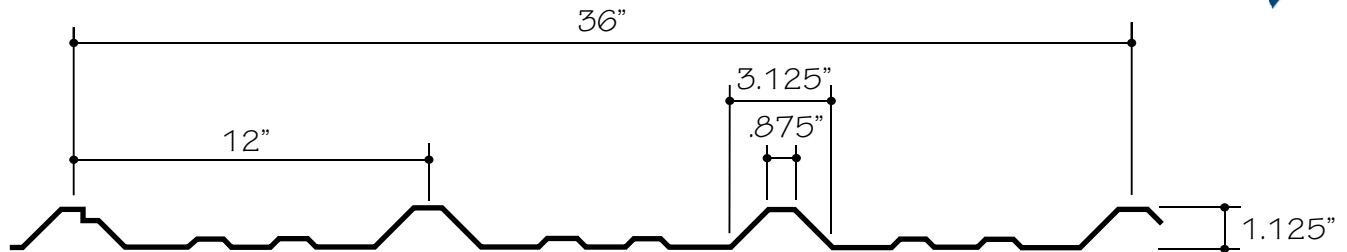


J Rib

With 12" rib spacing and 36" coverage, this is our most economical pre painted panel. Used in roofing, siding, soffit, mansard, and fascia applications.

- Best coverage
- Most economical pre painted panel
- 5' spanning capability
- Purlin bearing leg for added strength, support and weather-tightness
- Anti-capillary groove — no sidelap tape required
- Quick and easy installation

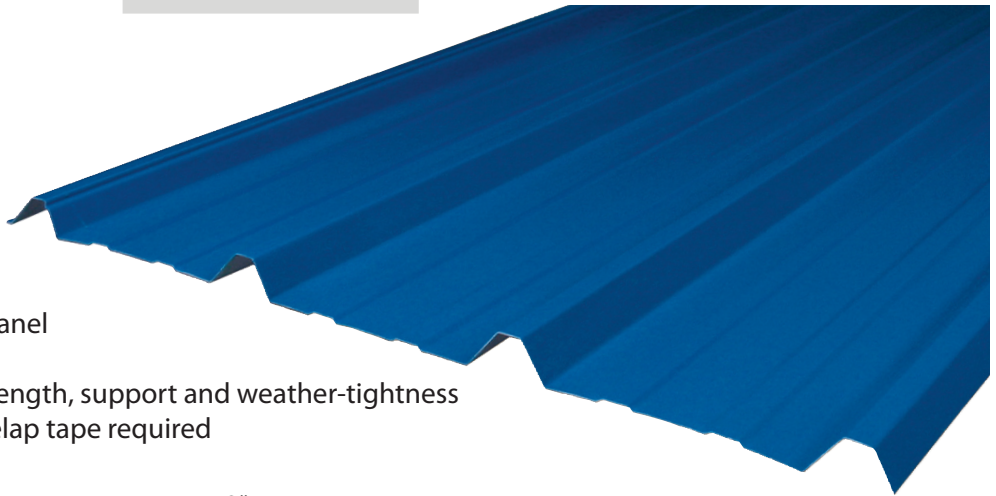

Allowable Load PSF											*Grade A FY=33KSI		
		36" SPAN			48" SPAN			54" SPAN			60" SPAN		
		SS	DS	TS	SS	DS	TS	SS	DS	TS	SS	DS	TS
26 GAUGE													
Roof	f	51.08	49.44	61.80	28.73	27.81	34.76	22.70	21.97	27.47	18.39	17.80	22.25
	L/240	51.08	49.44	61.80	28.73	27.81	34.76	22.02	21.97	27.47	16.05	17.80	22.25
	L/180	51.08	49.44	61.80	28.73	27.81	34.76	22.70	21.97	27.47	18.39	17.80	22.25
Wall	f	67.94	65.76	82.20	38.22	36.99	46.24	30.20	29.23	36.53	24.46	23.67	29.59
	L/240	67.94	65.76	82.20	38.22	36.99	46.24	20.95	29.23	36.53	15.27	23.67	28.83
	L/180	67.94	65.76	82.20	38.22	36.99	46.24	27.93	29.23	36.53	20.36	23.67	29.59
24 GAUGE													
Roof	f	65.15	63.77	79.71	36.65	35.87	44.84	28.96	28.34	35.43	23.45	22.96	28.70
	L/240	65.15	63.77	79.71	36.65	35.87	44.84	27.61	28.34	35.43	20.13	22.96	28.70
	L/180	65.15	63.77	79.71	36.65	35.87	44.84	28.96	28.34	35.43	23.45	22.96	28.70
Wall	f	86.65	84.81	106.02	48.74	47.71	59.64	38.51	37.70	47.12	31.19	30.53	38.17
	L/240	86.65	84.81	106.02	48.74	47.71	59.64	26.93	37.70	47.12	19.63	30.53	37.07
	L/180	86.65	84.81	106.02	48.74	47.71	59.64	35.91	37.70	47.12	26.18	30.53	38.17
22 GAUGE													
Roof	f	83.26	82.68	103.35	46.84	46.51	58.13	37.01	36.74	45.93	29.97	29.76	37.20
	L/240	83.26	82.68	103.35	46.84	46.51	58.13	35.22	36.74	45.93	25.67	29.76	37.20
	L/180	83.26	82.68	103.35	46.84	46.51	58.13	37.01	36.74	45.93	29.97	29.76	37.20
Wall	f	110.74	109.96	137.45	62.29	61.85	77.31	49.22	48.87	61.09	39.87	39.59	49.48
	L/240	110.74	109.96	137.45	62.29	61.85	77.31	35.07	48.87	61.09	25.57	39.59	48.27
	L/180	110.74	109.96	137.45	62.29	61.85	77.31	46.76	48.87	61.09	34.09	39.59	49.48

Section Properties**

GAUGE	26	24	22
Thickness (in.)	0.019	0.023	0.0296
S(+)	0.03483	0.04442	0.05677
S(-)	0.03371	0.04348	0.05637
I(+)	0.03113	0.03904	0.04980
I(-)	0.02962	0.03808	0.04959

*Load tables for grade C & aluminum available upon request
 **Section properties for aluminum available upon request.

SS = Single Span DS = Double Span TS = Triple Span

FASTENER PLACEMENT

